



FE-90D3
36"/900mm



FE-60D
24"/600mm



FE-30D
12"/300mm




FE-40D
16"/400mm


Features

- High performance motor and special design cylindrical drum give high velocity – cool down hot environment efficiently, effectively and evenly.
- Different colour for selection.
- Easy-to-move with castor
- Wide size range to suit different applications, e.g. production plants, job sites, warehouses, Shops, church, gym, office, household, etc.


FE-60D 24"/600mm
810±2

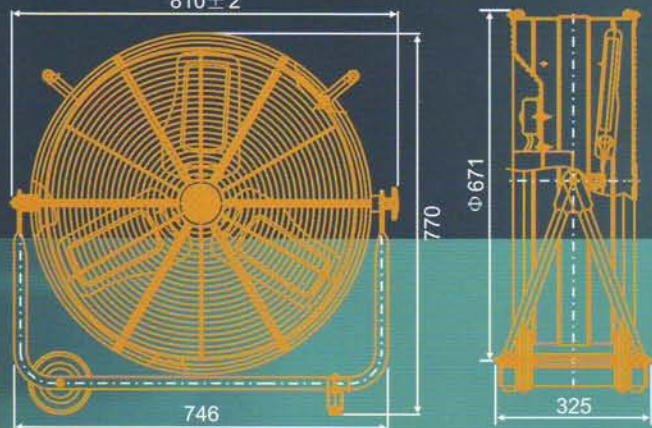


FE-90D3 36"/900mm

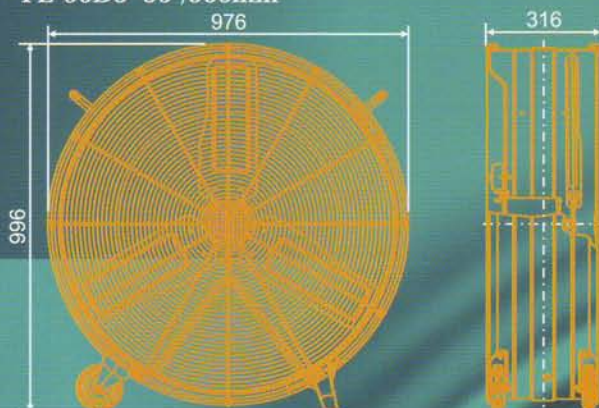

FE-30D 12"/300mm
370

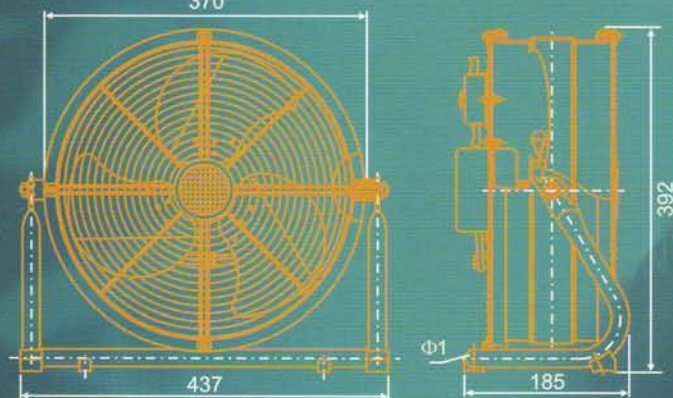

FE-40D 16"/400mm

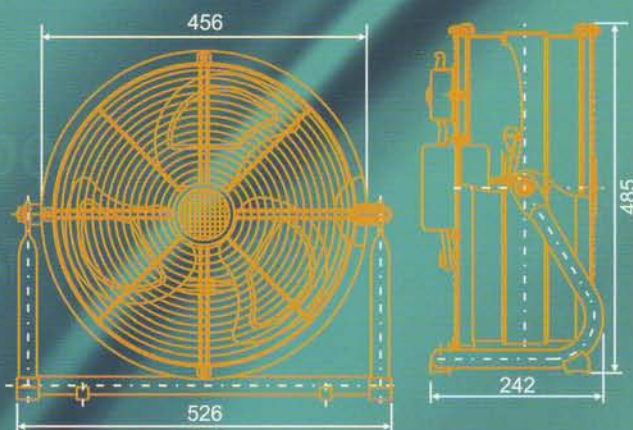

Specifications (220V~50Hz)

Model	Speed 1					Speed 2					Speed 3				
	Input Power (W)	Current (A)	Air Volume (m³/min)	Speed (RPM)	Noise (dB)	Input Power (W)	Current (A)	Air Volume (m³/min)	Speed (RPM)	Noise (dB)	Input Power (W)	Current (A)	Air Volume (m³/min)	Speed (RPM)	Noise (dB)
FE-30D	70	0.3	30	1100	55	80	0.35	40	1200	58	90	0.45	75	1350	65
FE-40D	125	0.6	55	1100	57	140	0.7	80	1250	63	180	0.85	130	1350	68
FE-60D	185	0.8	120	950	62	205	0.9	150	1080	68	265	1.25	205	1250	75
FE-90D3	480	2.1	270	1050	77	550	2.4	365	1200	82					

Packing

Model	G.W.(kgs)	N.W.(kgs)	Qty/Ctn(Pcs)	Dimensions/unit(cm)
FE-30D	5.8	5.1	1	45×20×41
FE-40D	9.8	8.6	1	62×27.5×56
FE-60D	18.5	16.5	1	78×33.5×80.5
FE-90D3	33	27.5	1	108×100×36

IMS International Ltd.

Unit 4A, 28/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T. Hong Kong.

Tel: 852-2881 8011

Fax: 852-2894 8682

Email: sales@imasu.com

Website: <http://www.imasu.com>